



Solideal Hauler SKS

Tires for Skid Steer Loaders

We Are All About Getting the Job Done. **For Less.**

The Solideal Hauler SKS is your solution for performance in the toughest skid steer applications. The Hauler SKS is the best choice for traction, flat protection and durability in off-road conditions. That's productivity. That's our Lowest Operating Cost Solution (LOCS).



Hauler Stepped Tread Design

- Maximized tread cleanout in off-road conditions for improved traction



Extra Wide, Deep Lug Design

- Longest wear and excellent traction in off-road conditions

Wide Sidewall

- 3x more rubber than standard SKS tires
- Provides ultimate side impact resistance

Reinforced Undertread

- Excellent tread impact resistance for fewer flat tires






Additional Facts About the Solideal Hauler SKS Tires for Skid Steer Loaders

Tire Specifications

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm]			LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar]	MAXIMUM TIRE LOAD [kg]		
		Recom- mended	Alternative	O.D.	O.W.	O.T.D. [mm]					Static	8 km/h	16 km/h
5.70-12	6	4.50I	5JA	585	157	12.0	93	A2	R4	4.20	1040	660	520
23x8.5-12	6	7.00I	7JA	578	210	12.5	101	A2	R4	3.50	1300	825	650
23x8.5-12	12	7.00I	7JA	578	218	12.5	115	A2	R4	7.00	1950	1235	980
27x8.5-15	6	7JA	6.5K/7J	680	210	13.0	112	A2	R4	3.10	1780	1125	890
27x10.5-15	8	8.50	8LB/8W	700	252	19.5	120	A2	R4	4.10	2200	1390	1100
31x15.5-15	8	13.00	13LB	782	385	24.0	126	A2	R4	3.10	2670	1690	1340
31x15.5-15	12	13.00	13LB	780	384	24.0	136	A2	R4	5.25	3520	2230	1760
10-16.5	8	8.25	-	784	275	16.5	129	A2	R4	4.20	2960	1875	1480
10-16.5	10	8.25	-	790	275	16.5	134	A2	R4	5.25	3380	2140	1690
31.5x13-16.5	10	9.75	-	787	311	18.0	139	A2	R4	4.90	3850	2435	1920
12-16.5	10	9.75	-	830	325	20.3	140	A2	R4	4.50	4020	2545	2010
33x15.5-16.5	12	12.00	-	829	386	20.0	145	A2	R4	4.10	4580	2900	2290
14-17.5	14	10.50	-	932	352	27.0	155	A2	R4	5.60	6120	3875	3060
15-19.5	14	11.75	12.25	1020	398	28.0	164	A2	R4	5.60	8010	5070	4010
385/65-22.5 (15-22.5)	12	11.75	12.25	1100	374	28.0	?	A2	R4	5.00	9090	5750	4540
385/65-22.5 (15-22.5)	16	11.75	12.25	1092	382	28.0	175	A2	R4	7.00	11120	7040	5560
385/45-28	16.00	W13x28	-	1086	370	25.5	176	A2	R4	6.50	11120	7040	5560
385/45-28	18.00	W13x28	-	1092	382	25.5	179	A2	R4	7.50	12140	7685	6070

The wear rate and estimated life charts reflect field test results that demonstrate that the Hauler SKS provides superior durability and value and the lowest operating cost solution.

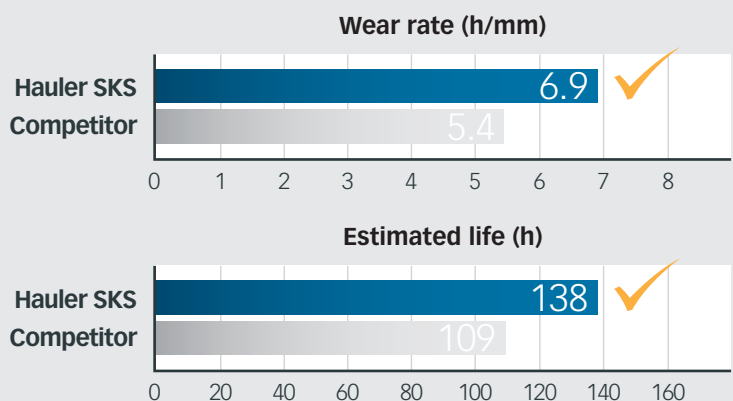

Authorized Distributor:

