

CAMSO CMP 576

FORMERLY SOLIDEAL SM C1



COMPACTORS



EXCELLENT COMPACTION PERFORMANCE

Provides excellent performance and durability. Wears evenly and reduces ground pressure for maximum compaction.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO CMP 576



SMOOTH, FLAT TREAD PROFILE

- Promotes even wear and reduced ground pressure for better compaction performance

HEAT-RESISTANT RUBBER COMPOUND


Improves durability for lower cost per hour

ROBUST TREAD SHOULDER


- Provides optimum compaction and minimal grooving

TIRE SIZE	PR	INFLATION PRESSURE [bar] [PSI]	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS		LOAD INDEX	SPEED SYMBOL	TRA CODE	LOAD CAPACITY [kg] [lb]	
							Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]				10 km/h 6 mph	15 km/h 9 mph
7.50-15 NHS	14		TT	700/750/815-17	TR 440	7.00/7.50/8.25-15	6.00	6.50	788	214	136	A3	C-1	2835	2270
									31.0	8.4				6250	5000
8.50/90-15K	6		TBLS	-	-	-	6.00	5.5F	761	217	120	A3	C-1	1770	1400
									30.0	8.5				3900	3100
11.00-20 NHS	16		TT	10.00/11.00-20	V3-02-15 TR 444	8.25/9.00/10.00/11.00/12.00-20	8.00	8.50	1056	287	158	A3	C-1	5445	4355
									41.6	11.3				12000	9600

7.50-15 PR 14

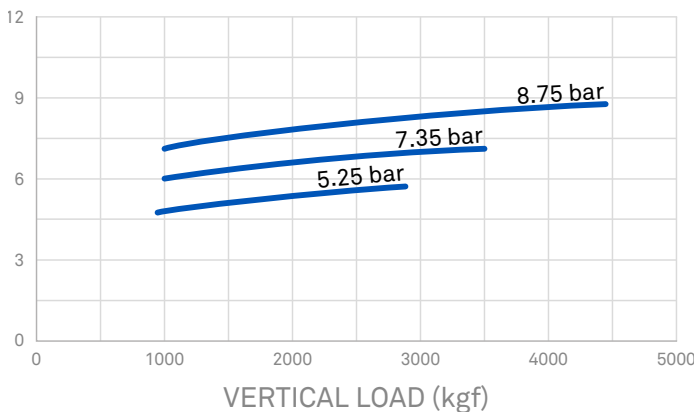

— POSITIVE CONTACT PRESSURE (kg/cm²)



Camso CMP 576 compactor tire features robust tread construction with breakers designed to limit tread crowning. This helps **promote even tread wear** and reduced ground pressure.

AUTHORIZED DISTRIBUTOR:

camso.co

