



Solideal TH2

Tires for Telehandlers

We Are All About Getting the Job Done. **For Less.**

The Solideal TH2 is a high-quality telehandler tire offering good durability and reliability on off-road surfaces. That's our Lowest Operating Cost Solution (LOCS).



Optimized Tread Pattern

- Enhanced traction and self-cleaning

Deep Tread Depth

- Increased durability and traction

Robust Carcass

- Flatter tread profile resists crowning when inflated
- Good impact resistance



Solideal

HI-PERFORMANCE TIRES




Additional Facts About the Solideal TH2

Tires for Telehandlers

Tire Specifications

| TIRE SIZE | PR | TREAD PATTERN | RIM SIZE | | ACTUAL TIRE DIMENSIONS [mm] [inch] | | | MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI] | | | | | | |
|-------------|----|---------------|-------------|-------------|------------------------------------|------|--------------------|---|------|------|------|----------|----------|------|
| | | | Recommended | Alternative | O.D. | O.W. | O.T.D. [mm] [32nd] | 1.25 | 1.50 | 1.75 | 2.00 | 2.25 | 2.50 | 2.75 |
| | | | | | | | | 18 | 21 | 25 | 29 | 32 | 36 | 39 |
| 13.00-24 TG | 12 | TH2 | 8.00TG | 10.00VA | 1261 | 358 | 22 | 1700 | 1900 | 2060 | 2240 | 2360(10) | 2500 | 2650 |
| | | | | 9.00DC | 49.6 | 14.1 | 28 | 3750 | 4200 | 4550 | 4950 | 5200(10) | 5500 | 5850 |
| 14.00-24 TG | 12 | TH2 | 8.00TG | 10.00VA | 1324 | 384 | 22 | 2060 | 2300 | 2500 | 2650 | 2800 | 3075(12) | 3250 |
| | | | | 9.00DC | 52.1 | 15.1 | 28 | 4550 | 5100 | 5500 | 5850 | 6200 | 6800(12) | 7150 |

The Solideal TH2 was designed as a high-quality telehandler tire solution suitable for a wide variety of applications. The TH2's flatter tread profile resists crowning when inflated for improved stability and even tread wear.

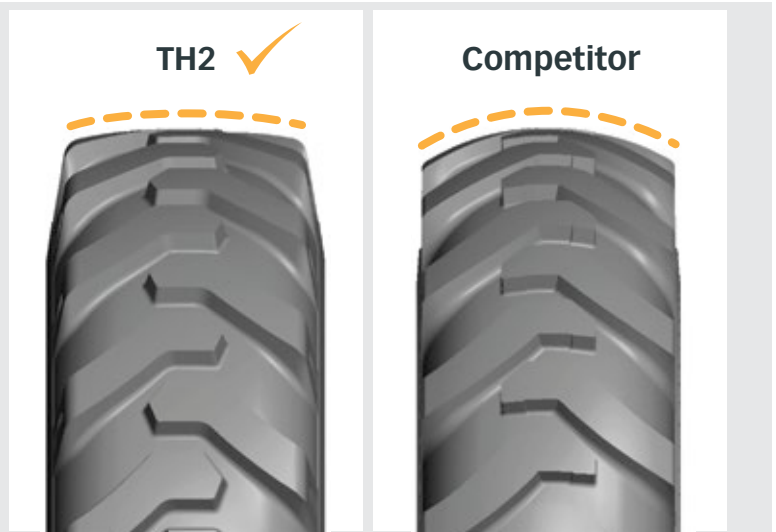

Authorized Distributor:

